



Javelin J360i

Print reliably and consistently with this sturdy, high-performance single-sided colour card printer

The perfect solution for simple, straightforward card printing and personalization, the NBS Javelin J360i colour card printer offers a dynamic feature set with options such as built-in Ethernet and contact and contactless smart card encoding. With its unique, streamlined design and metal enclosure, the Javelin J360i is lightweight yet extremely robust and sturdy.

Powerful

Setting new standards, this single-sided, full colour card printer is loaded with user-friendly features and a full range of options, making the Javelin J360i the most powerful and flexible printer in its class.

Reliable

With its new, innovative, highly reliable angled feeder design (patent pending), there is simply no better choice than the Javelin J360i for mission critical applications.

Flexible

Designed to integrate seamlessly in a wide variety of applications, the Javelin J360i comes standard with an LCD and offers a full range of options, including magnetic stripe encoding and smart card personalization.

FEATURES

- *Sturdy yet lightweight case*
- *Full colour print speed of 25 seconds per card*
- *USB with optional built-in Ethernet*
- *100 card capacity feeder plus extension kit*
- *LCD for immediate printer status*
- *TrueColours™ colour ribbon supplied with each printer*



Javelin® J360i *Technical Details*

GENERAL SPECIFICATIONS

- Colour dye sublimation or monochrome thermal transfer printing
- 25 seconds per card - full colour, single sided (YMCKO)
- 4 seconds per card - monochrome
- 300 dpi (11.8 dots/mm) print resolution
- Card feeder capacity 100 cards (30 mil)
- Card feeder extension kit increases capacity to 200 cards (30 mil)
- Card output hopper capacity - 100 cards (30 mil)
- USB port
- Port for Kensington® security lock
- 16Mb image memory standard
- Windows® 2000 and XP drivers
- Up to 3 year printer warranty
- Up to 2 year (unlimited passes) printhead warranty

OPTIONS

- Smart card contact station (30 mil cards only)
- Smart card personalization kit (including internal coupler)
- Contactless encoding (Mifare and HID)
- Built-in Ethernet
- Dual Coercivity, 3-track magnetic encoder (30 mil cards only)
- Hot Swap warranty program (USA & UK only)
- Cleaning supplies
- Service Manual

RIBBONS

Javelin i-Series printers require the use of Javelin branded i-Series TrueColours ribbons for full colour printing.

- Monochrome colours: black, red, blue, green, silver, gold, white and scratch-off gray
- YMCKO - 200 & 330 cards/roll
- Half-panel YMC plus full-panel KO - 450 cards/roll

- KdO - 500 cards/roll
- KrO - 500 cards/roll
- Overlay varnishes - clear and hologram: 350 cards/roll

BAR CODES & FONTS

- Code 39, Code 128 B and C with and without check digit
- 2 of 5 and 2 of 5 interleaved
- UPC-A, EAN 8 and EAN 13
- PDF-417 2D bar code, other symbologies and True Type fonts via Windows® drivers

CARD SPECIFICATIONS

- Types - PVC, PVC composite
- Card width/length: ISO CR-80 - ISO 7810, 2.125" (54mm) x 3.385" (86mm)
- Magnetic stripe - ISO 7811
- Smart card - ISO 7816-2
- Card thickness - 10 mil (.25mm) to 60 mil (1.524mm) +/- 10%

PHYSICAL DIMENSIONS


- Width: 18.2" (462mm) excluding hopper
- Depth: 8.2" (208mm)
- Height: 9.7" (246mm)
- Weight: 24 lbs (10.9 kg)

ENVIRONMENTAL

- Operating temperature: 60°F to 86°F (15°C to 30°C)
- Operating humidity: 20% to 65% non-condensing
- Storage temperature: 23°F to 158°F (-5°C to 70°C)
- Ventilation: free air

ELECTRICAL

- 110 ~ 240 Volts AC, 50 ~ 60 Hz (auto switching)
- FCC Class B, CE, UL and CUL approved

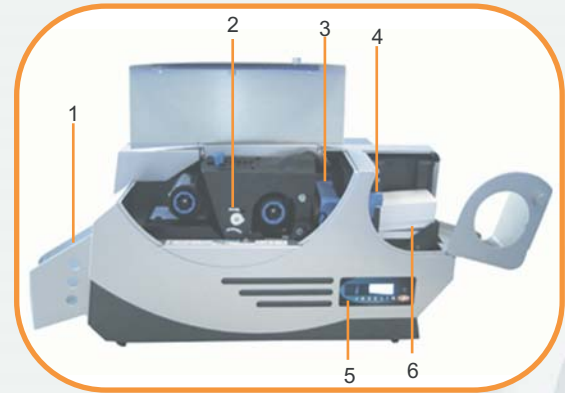

1. Large output hopper
2. User replaceable printhead
3. Easy-to-change cleaning roller
4. Simple card thickness adjuster
5. LCD display panel
6. Easy single card feed



Wide open print head bracket makes for easy ribbon loading



LCD shows current status of printer



For batch printing, use the card feeder extension kit



Software drivers for Javelin Card Printers have been tested to ensure that they meet Microsoft® standards for Windows® compatibility. Microsoft, Windows, and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries.



Always use TrueColours™ certified media from NBS Technologies



All specifications are subject to change without notice.



Corporate Headquarters
703 Evans Avenue
Toronto, Ontario
M9C 5E9
Canada
tel: +1 416.621.1911
fax: +1 416.621.8875

With locations around the globe to serve you:

USA
70 Eisenhower Drive
Paramus, NJ 07952
USA
tel: +1 201.845.7373
fax: +1 201.845.3337

UK
7 Byfleet Technical Centre
Canada Road
West Byfleet, Surrey
KT14 7NB
United Kingdom
tel: +44 (0) 1932.351531
fax: +44 (0) 1932.351382

France
Zone Industrielle -
Avenue Villeveille
13106 Rousset Cedex
France
tel: +33 (0) 42.53.27.72
fax: +33 (0) 42.53.26.41

China
3rd floor, Building 4, No.471
Guiping Road
Caohejing HI-TECH Park
200233 Shanghai
P.R. of China
tel: +86 (21) 649.595.31/32
fax: +86 (21) 649.595.33

Website: www.nbstech.com
© 2-Oct-06 NBS Technologies Inc.

Email: info@nbstech.com

All rights reserved. All brand and product names are the trademarks or registered trademarks of their respective holders.