



## Javelin J430i

### *Performance, Reliability and Expandability in a Dual-sided Card Printer*

The Javelin J430i is part of the latest generation of NBS's most popular card printer family. Designed and built for demanding environments, the Javelin J430i delivers reliability and performance for high-volume card production. Expansion options for networking and card encoding give the Javelin J430i the flexibility to meet your specific requirements. Affordable and easy to use, the Javelin J430i a leader in dual-sided performance card printers.

#### **Innovative and Easy-to-Use**

- Easy plug and play USB or USB with Ethernet interface simplifies configuration
- Print head bracket opens wide for easy ribbon access
- 16 character LCD screen for printer status and error reporting messages
- Translucent card cover allows you to see when supplies are running low, and blank cards can be added while printing
- Reject bin holds cards that fail to encode correctly

#### **High Performance**

- Vibrant, true-to-life colours
- High volume card through put
- Large capacity card feeder available
- Gentle open & close print head latch

#### **Reliable and Flexible**

- Print dual-sided or single-sided
- Revolutionary angled card feeder design means fewer rejected cards\*
- Self-aligning print head design for consistently uniform print quality i-Series™ functionality
- Automatic colour optimisation and driver configuration
- Enhanced ribbon formulation for optimal colour output
- Ribbon image counter and ribbon low notification

#### **Encoding and Network Connectivity Expansion Options**

- 3 track magnetic stripe encoding (HiCo/LoCo)
- Contact and contactless smart card encoding capabilities
- Built-in 10/100 Ethernet for printer networking simplifies device management and eliminates the need for third party external device.



**... the answer to easy  
dual sided printing...**

\*patent pending

# Javelin® J430i Technical Details

## Ideal for:

- Employee ID cards
- Student and faculty ID cards
- Access control cards
- Personalised membership and loyalty cards
- Gift cards
- Visitor ID cards
- Government Licences

## GENERAL SPECIFICATIONS

- 16-character LCD display
- Windows® drivers for 2000 and XP
- Bi-directional driver communication
- Up to three (3) year printer warranty
- Up to two (2) year (unlimited passes) print head warranty

## PRINTING

- Colour dye sublimation or monochrome thermal transfer printing
- 102 cards per hour full colour dual-sided (YMCKOK)
- 130 cards per hour full colour single-sided (YMCKO)
- 300 dpi (11.8 dots/mm) print resolution

## BAR CODES

- Code 39, Code 128 B & C with & without check digit
- 2 of 5 & 2 of 5 Interleaved
- UPC-A, EAN 8 & EAN 13
- PDF-417 2D bar code and other symbologies can be printed via Windows drivers

## CARD SPECIFICATIONS

- Types: PVC, PVC Composite, Adhesive backed
- Card width/length: ISO CR-80-ISO 7810, 2.12" (54mm) x 3.38" (86mm)
- Magnetic Stripe-ISO 7811
- Smart Card contact and contactless
- Card thickness: 10 mil (.25mm) to 60 mil (1.524mm) (+/- 10%)
- Card feeder capacity: 100 cards (30 mil) or 220 cards (30 mil)
- Card output hopper capacity: 100 cards (30 mil)

## COMMUNICATIONS INTERFACE

- USB 1.1 (USB 2.0 compatible) cable included
- Optional Built-in 10/100 Mbps Ethernet

## RIBBON SPECIFICATIONS\*

*i-Series™ Printers require the use of i-Series™ ribbons for full colour printing*

- YMCKOK: 170 cards/roll
- YMCKO: 200 & 330 cards/roll
- 1/2 Panel YMC Full KO: 450 cards/roll
- KdO: 500 cards/roll
- KrO: 500 cards/roll
- Overlay varnishes: Clear and Hologram: 350 cards/roll
- Monochrome: 1500 (Black) & 1000 cards/roll
- Monochrome colours: black, red, blue, green, silver, gold, white and scratch-off grey

\*for optimum printer performance use Genuine NBS Supplies

## MECHANICAL

- Width: 26 in (660 mm)
- Depth: 9.4 in (239 mm)
- Height: 10.1 in (256 mm)
- Weight: 20 lbs (9.1 kg)

## ELECTRICAL

- 110 ~ 240 Volts AC, 50 ~ 60 Hz (auto switching)
- 4MB image memory standard
- FCC Class A, CE, UL and CUL approved

## ENVIRONMENTAL

- Operating Temperature: 60°F to 86°F (15°C to 30°C)
- Operating Humidity: 20% to 65% non-condensing
- Storage Temperature: 23°F to 158°F (-5°C to 70°C)
- Storage Humidity: 20% to 70% non-condensing
- Ventilation: Free air


## OPTIONS

- Built-in 10/100 Mbps Ethernet
- Smart card contact-ISO 7816 encoder (30 mil cards only)
- Contactless Smart card MIFARE®/DESFire and HID iClass® encoder (30 mil cards only)
- Magnetic encoder (30 mil cards only) 3 track HiCo/LoCo
- High capacity feeder (220 cards)
- Cleaning supplies

## GENUINE NBS SUPPLIES

Your choice of card printer supplies is critical. It is a primary factor affecting the reliability and consistency of printing. Genuine NBS Supplies meet stringent quality standards and are tested for optimum performance with Javelin card printers.

Designed and built to ISO 9001 certification standards.

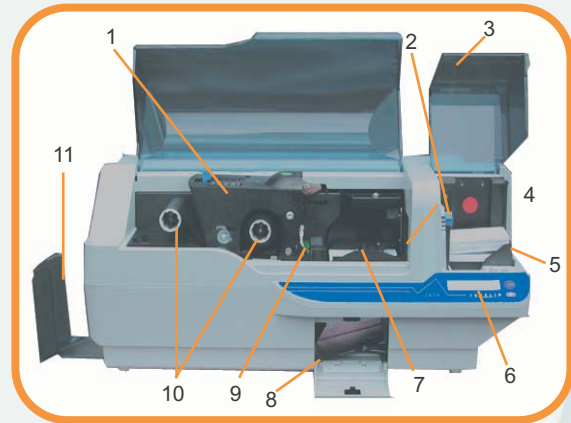

- 1 User replaceable print head
- 2 Simple card thickness adjuster
- 3 Covered input hopper
- 4 Angled card feeder
- 5 Easy single card feed
- 6 LCD display panel
- 7 Flip-over unit
- 8 Reject card box
- 9 Automatic cleaning
- 10 Easy to load ribbon
- 11 Output hopper



Integral flip-over unit for dual-sided printing



Software drivers for Javelin Card Printers have been tested to ensure that they meet Microsoft® standards for Windows® compatibility. Microsoft, Windows, and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries.



Always use TrueColours™ certified media from NBS Technologies



All specifications are subject to change without notice.



**Corporate Headquarters**  
703 Evans Avenue  
Toronto, Ontario  
M9C 5E9  
Canada  
tel: +1 416.621.1911  
fax: +1 416.621.8875

**With locations around the globe to serve you:**

**USA**  
70 Eisenhower Drive  
Paramus, NJ 07652  
USA  
tel: +1 201.845.7373  
fax: +1 201.845.3337

**UK**  
7 Byfleet Technical Centre  
Canada Road  
West Byfleet, Surrey  
KT14 7NB  
United Kingdom  
tel: +44 (0) 1932.351531  
fax: +44 (0) 1932.351382

**France**  
Zone Industrielle -  
Avenue Villeveille  
13106 Rousset Cedex  
France  
tel: +33 (0) 42.53.27.72  
fax: +33 (0) 42.53.26.41

**China**  
3rd floor, Building 4, No.471  
Guiping Road  
Caohejing HI-TECH Park  
200233 Shanghai  
P.R. of China  
tel: +86 (21) 649.595.31/32  
fax: +86 (21) 649.595.33

Website: [www.nbstech.com](http://www.nbstech.com)  
© 2-Oct-06 NBS Technologies Inc.

Email: [info@nbstech.com](mailto:info@nbstech.com)

All rights reserved. All brand and product names are the trademarks or registered trademarks of their respective holders.